


ASSEMBLY INSTRUCTIONS

Comfort Series - Big & Tall

Pivot Arm Chair (Leather)



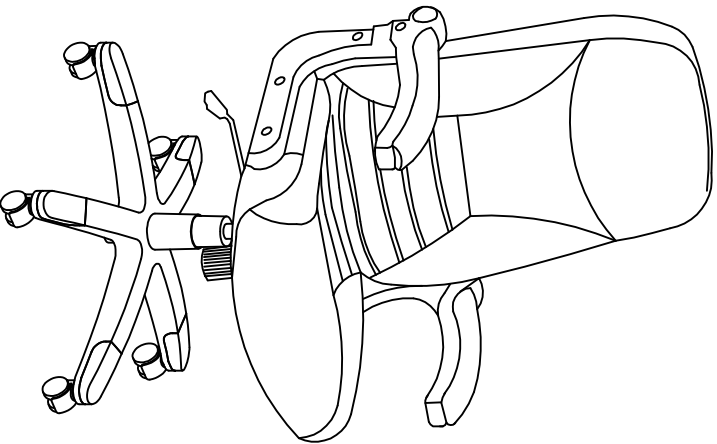








Model No. 6446AGL



PARTS LIST 6446AGL

When ordering components, specific color and/or size information may be required.
Contact a Mayline Customer Service Representative. 1-800-822-8037

* Individual Items, Order by part number.
** Denotes Color Code.

Reference Letter A*	 102019 Lumber Bulb	Quantity 1	Reference Letter G*	 Part Number 101520 Cylinder	Quantity 1
Part Number 101594** Back			Reference Letter H*	 Part Number 101479 Cylinder Cover	1
Reference Letter B*	 101447 Lumbar Holster	1	Part Number 101432* Hardware Bag		
Part Number 101595** Seat			Reference Letter J	 Screw 1/4-20 x 1-1/4"	Quantity 16
Reference Letter C*		2	Reference Letter K*	 101512 Arm Plug	8
Part Number 101600** Arms (pair)			Reference Letter L	 Allen Wrench	1
Reference Letter D*		1	Part Number 101455 Mechanism		
Part Number 101521 Castor (5 per pack)		5	Reference Letter E*		
Reference Letter F*		1	Part Number 101517 Base		1




Tiffany Industries™


A MAYLINE GROUP COMPANY

619 N. Commerce, P.O. Box 728
Sheboygan, WI 53082-0728

Toll Free: 1-800-822-8037
FAX: 920-457-7388
On Line: www.mayline.com

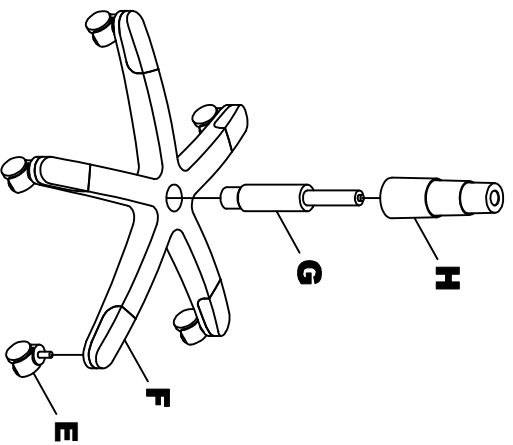


1. Place Base (F) upside down and push Casters (E) firmly into base. 5 places.
2. Turn Base right side up and insert Cylinder (G) into center hole of Base.
3. Place Cylinder Cover (H) over Cylinder.

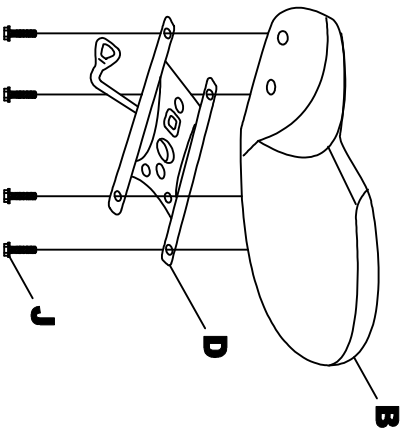


4. Assemble Mechanism (D) onto Seat (B) using Screws (J) 4 places.

2

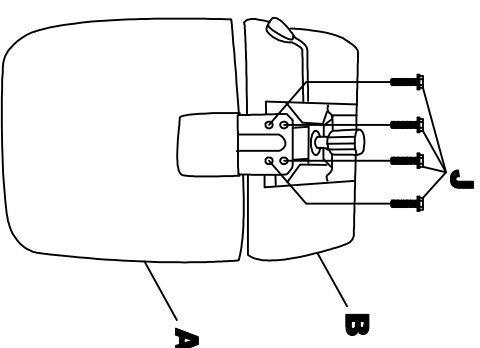


5. Assemble Back (A) onto Seat (B) using Screws (J) 4 places. DO NOT TIGHTEN SCREWS at this time. This will allow a tolerance when assembling arms.

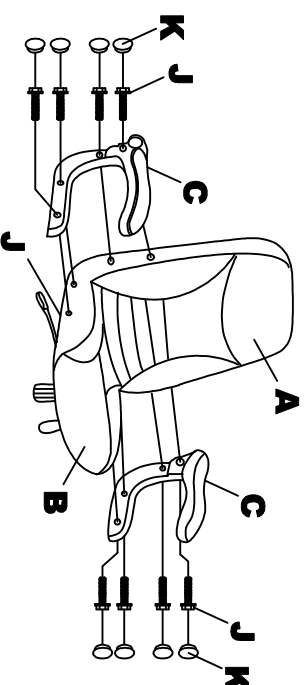

6. Assemble Arms (C) 2 places onto Back (A) & Seat (B) using Screws (J) 8 places. DO NOT TIGHTEN SCREWS at this time.
7. After both arms are installed tighten all Screws (J) 12 places.
8. Insert Arm Plugs (K) into Arms (C) 8 places.

3

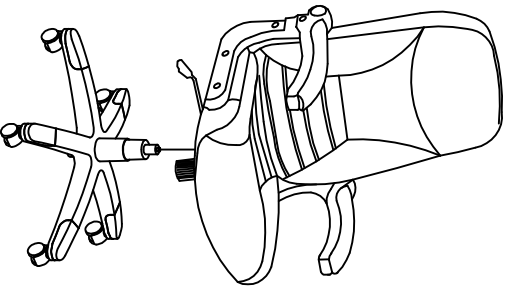

8. Carefully place chair assembly onto base assembly.

NOTE:

Periodically (Every 90 days) make sure screws are fully tightened.

OPERATING INSTRUCTIONS FOR CENTER PIVOT MECHANISM

1. Seat Height Adjustment.


To raise the seat, pull lever upward and raise your body up slightly to allow the chair to rise to the desired height.

To lower the seat, pull lever upward and apply weight downward on the seat.

Seat Upright Lock.

To lock chair in upright position, lean forward and push knob toward chair.

To unlock chair in upright position, lean forward and pull away from chair.



2. Tilt Tension Control Knob.

Turn knob clockwise to increase tilt tension.

Turn knob counter-clockwise to decrease tilt tension.