







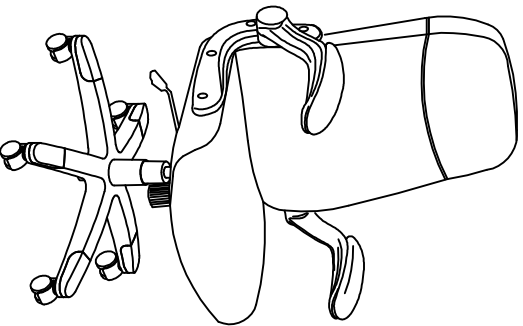



ASSEMBLY INSTRUCTIONS
COMFORT SERIES - BIG & TALL
PIVOT ARM CHAIR (FABRIC)
MODEL NO. 6446AG









IMPORTANT!
Review ALL instructions before beginning assembly. These instructions are provided to avoid problems that may occur from improper assembly or installation. Mayline and/or its distributor are not responsible for failure resulting from improper assembly or installation of this product. Moreover, all warranties are void for failure to follow these assembly instructions.


PARIS LIS I 6446AG
 When ordering components, specific color and/or size information may be required.
 Contact a Mayline Customer Service Representative. 1-800-822-8037
 * Individual Items, Order by part number.
 ** Denotes Color Code

Reference Letter A*		Quantity 1
Part Number CM300** Back	CM366 * Lumbar Bulb	
Reference Letter B*		1
Part Number CM310** Seat	CM367 * Lumbar Holster	
Reference Letter C*		STARTING WITH PO 231665
Part Number CM323** Arms New (pair)		
Reference Letter C*		1
Part Number CM320** Arms (pair)		
Reference Letter D*		1
Part Number CM330 Mechanism		
Reference Letter E*		5
Part Number CM336 Caster (5 pack)		
Reference Letter F*		1
Part Number CM340 Base		


Reference Letter G*		Quantity 1
Part Number CM347 Cylinder		
Reference Letter H*		1
Part Number CM350 Cylinder Cover		

Part Number
CM358 * Hardware Pack
CM355 * Hardware Pack (pre PO 231665)

Reference Letter J		Quantity 4	Spare 1
Reference Letter K		4	1
Reference Letter L		6	1
Reference Letter M		6	1
Reference Letter N		1	
Reference Letter O		1	

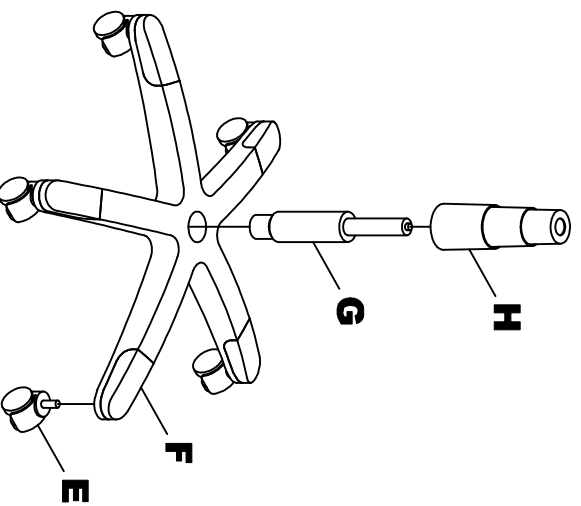


1. Place Base (F) upside down and push Casters (E) firmly into base. 5 places.
2. Turn Base right side up and insert Cylinder (G) into center hole of Base.
3. Place Cylinder Cover (H) over Cylinder.

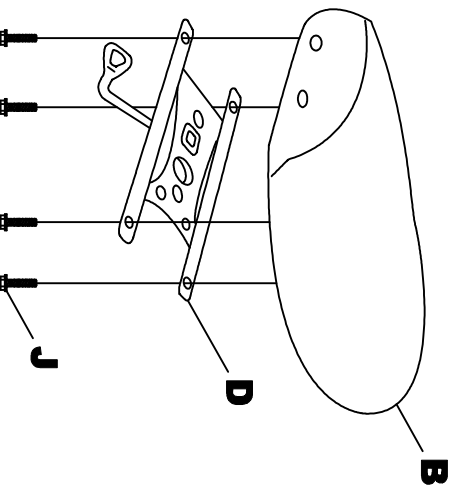


4. Assemble Mechanism (D) onto Seat (B) using Screws (J) 4 places.

(3)

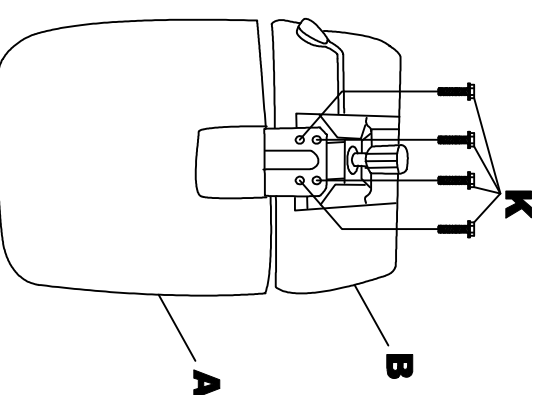


5. Assemble Back (A) onto Seat (B) using Screws (K) 4 places. DO NOT TIGHTEN SCREWS at this time. This will allow a tolerance when assembling arms.

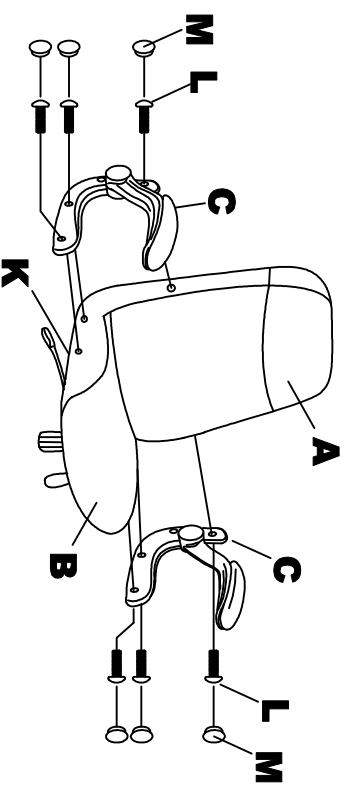

6. Assemble Arms (C) 2 places onto Back (A) & Seat (B) using Screws (L) 6 places. DO NOT TIGHTEN SCREWS at this time.
7. After both arms are installed tighten all Screws (K) 4 places and Screws (L) 6 places.
8. Insert Arm Plugs (M) into Arms (C) 6 places.

(4)

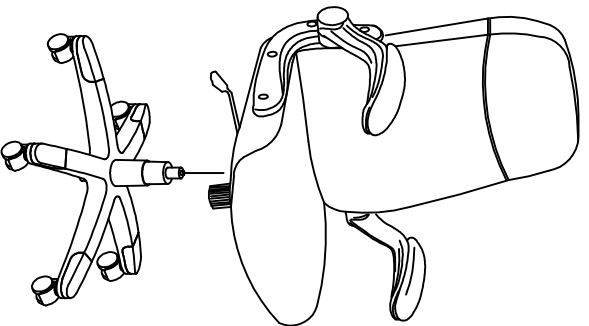

8. Carefully place chair assembly onto base assembly.

NOTE:

Periodically (Every 90 days) make sure screws are fully tightened.

OPERATING INSTRUCTIONS FOR CENTER PIVOT MECHANISM

1. Seat Height Adjustment.


To raise the seat, pull lever upward and raise your body up slightly to allow the chair to rise to the desired height.

To lower the seat, pull lever upward and apply weight downward on the seat.

Seat Upright Lock.

To lock chair in upright position, lean forward and push knob toward chair.

To unlock chair in upright position, lean forward and pull away from chair.

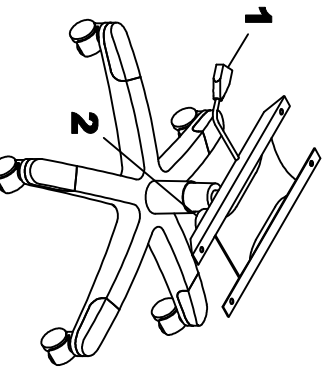

2. Tilt Tension Control Knob.

Turn knob clockwise to increase tilt tension.

Turn knob counter-clockwise to decrease tilt tension.