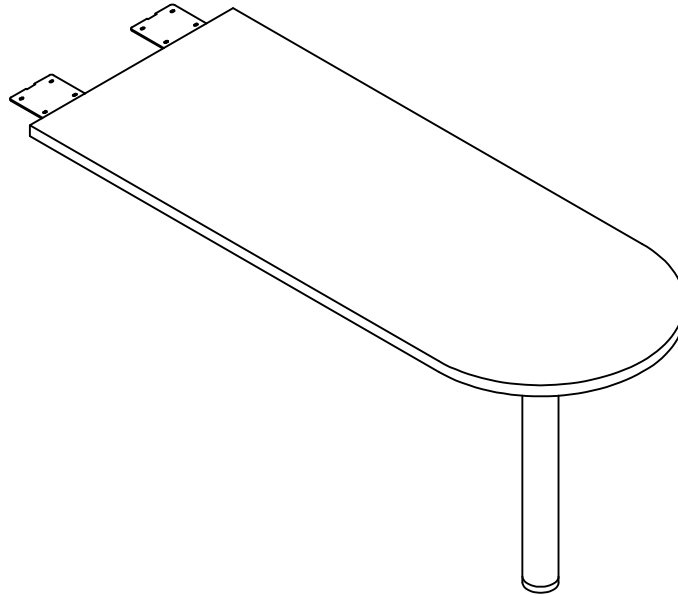

CATALOG No:

C673
C675
C677

C683
C685
C687

C693
C695
C697





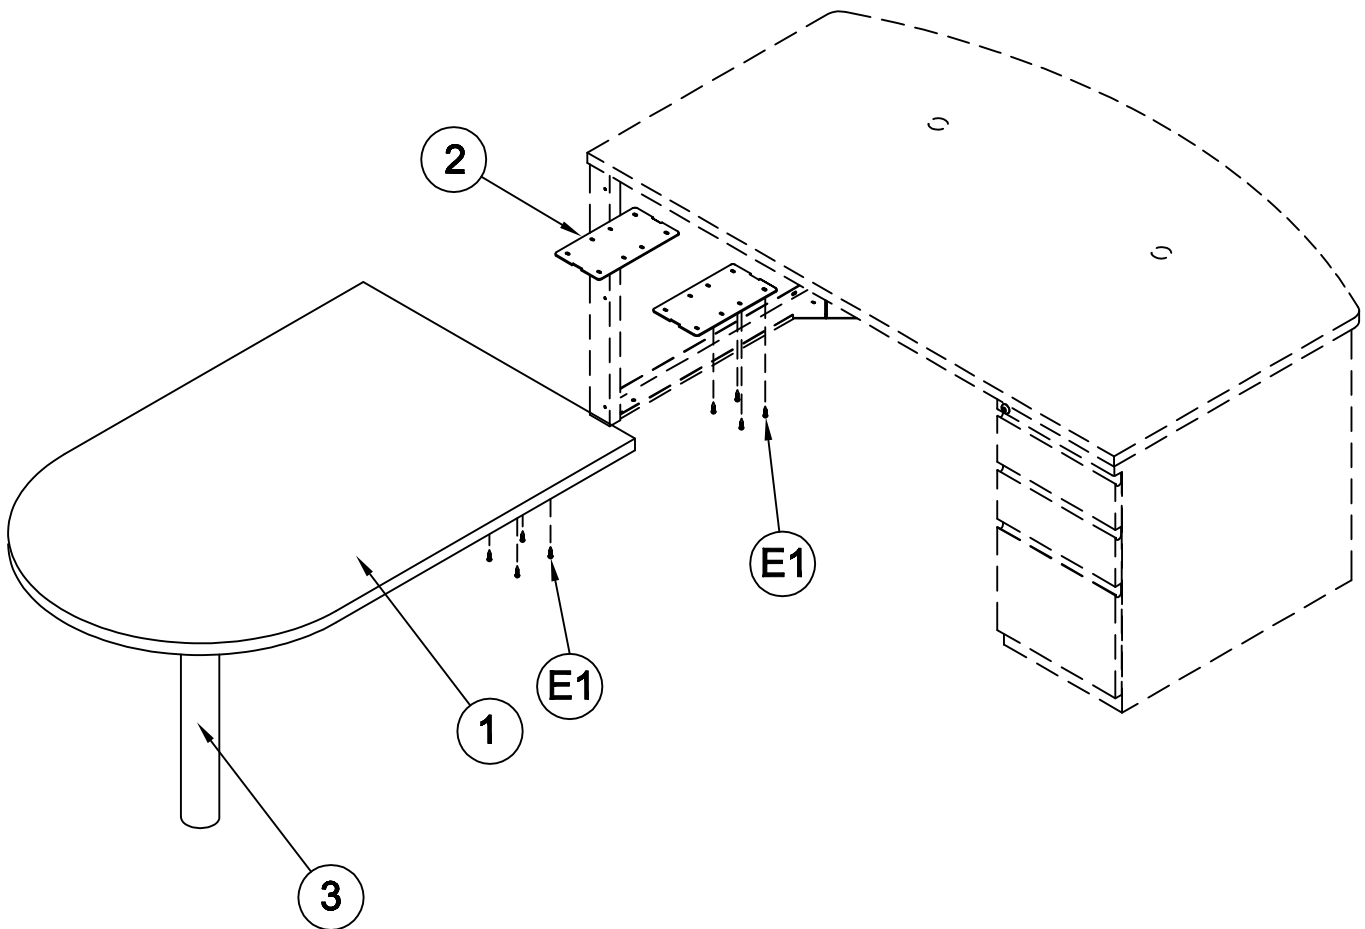
NOTE: Please count and inspect all pieces before disposing of any carton or packing materials.

COMPONENTS: When ordering components, specific color and/or size information may be required. Contact a Mayline Customer Service Representative. 1-800-822-8037

<u>REF. #</u>	<u>QTY.</u>	<u>DESCRIPTION</u>	<u>PART No.</u>	
1	1	WORK SURFACE	CALL~~**	** Denotes Color Code
2	2	CONNECTOR PLATE	B7522	~~Denotes Size
3	1	POST LEG	B5185**	

HARDWARE BAG (PART No. A7647) *for individual part, order that part number

<u>REF. #</u>	<u>QTY</u>	<u>DESCRIPTION</u>	<u>PART No.</u>	
E1	20	#10 X 3/4 SCREW	X11*	 



Peninsula Assembly:

NOTE: Size may vary but assembly procedure remains the same.

1. Place the Work Surface (1) face down onto a clean, protected surface.
2. Align the holes in the Post Leg (3) mounting plate with the pre-drilled holes in the Work Surface. Secure the mounting plate with four screws (E1). Thread the Post Leg onto the mounting plate stud.
3. Align the holes in the two Connector Plates (2) with the pre-drilled holes in the underside of the Adjacent Desk. Secure the Connector Plates using four Screws (E1) for each plate.
4. Place the adjacent desk at the location where it will be used. MAYLINE recommends that a minimum of two people perform this task.
5. Place the assembled Peninsula in the upright position. MAYLINE recommends that a minimum of two people perform this task.
6. Lay the assembled Peninsula onto the Connector Plates (2). Align pre-drilled holes in the underside of the Peninsula with the holes in the two Connector Plates and secure the Plates using four screws (E1) for each plate.

Peninsula Assembly:

NOTE: Size may vary but assembly procedure remains the same.

